



96 x 96mm

Features :

- 8 Channels
- On delay / Interval / Cyclic ON first / Cyclic OFF first
- Parallel / Sequential Operation
- Cascade Output for Channel Expansion
- Start, Hold Input
- Start Delay Programmable
- Reset Input
- 5 Time Ranges
- 10 Years Memory Retention

Display Specifications

Display	4 digits for Timer, 2 digits for Channel no.
LED Indications	Relay ON, Cascade o/p, Time Ranges, ON / OFF time, Timing in progress

Input Specifications

Accuracy	±0.5% of setting or 50ms, whichever is greater
Start Input	Start, Hold

Output Specifications

Relay Contact	8 nos., NO with single Common
Contact Rating	5A@230V AC

Functional Specifications

Modes	ON delay, Interval, Cyclic ON first, Cyclic OFF first (start up delay & no. of cycles programmable for cyclic mode)
Time Ranges	0 - 99.99sec 0 - 999.9sec 0 - 99.59min : sec 0 - 99 : 59hr : min 0 - 999.9hr
Resolution	0.01sec
Counting Direction	Up
Set Points	8
Time Setting	Front keypad
Reset	Front, Remote, Power interruption
Memory Retention	10 Years
Configuration Lock	via rear terminals
No of Channels	8 channels

Auxiliary Supply Specifications

Supply Voltage	85 to 270V AC / DC (50 or 60 Hz)
Power Consumption	3VA Max.


Environmental Specifications

Temperature	Operating : 0 to 50°C Storage : -5 to 50°C
Humidity (non - condensing)	95% RH


Mechanical Specifications

Mounting	Panel Mount
Weight	420gms


Dimensions

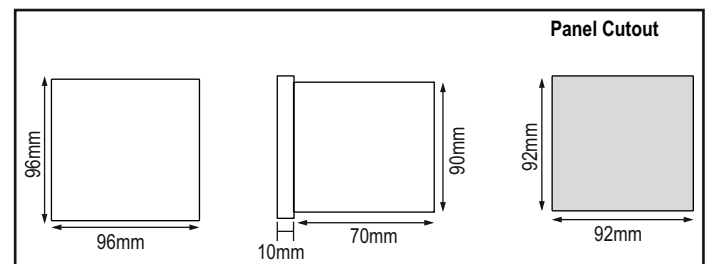

Terminal Connections

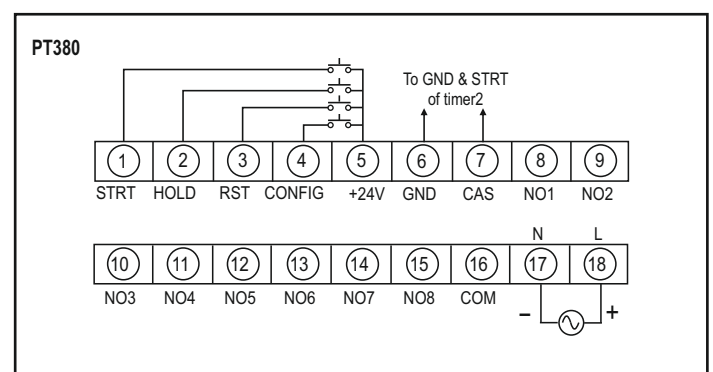

Timing Diagram

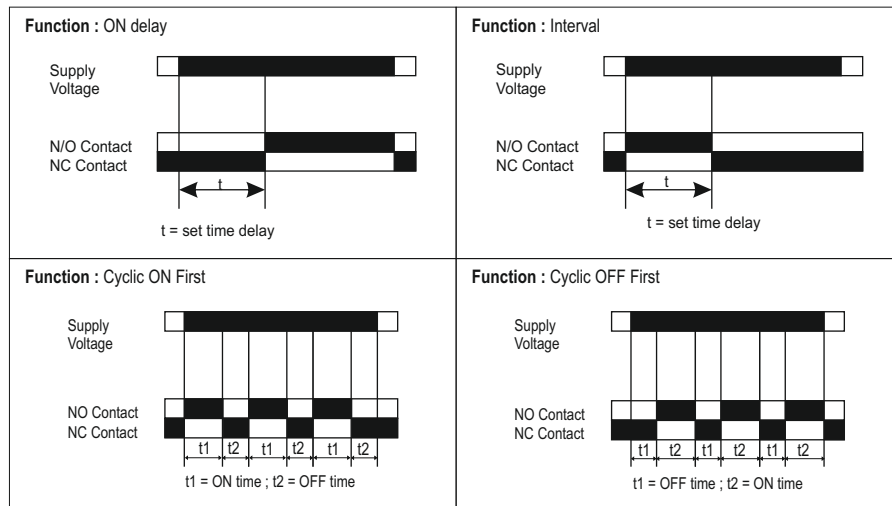

Ordering Information

Product Code	Supply Voltage
PT380	85 to 270V AC / DC